

InfiniSolar V II

Operation without battery




InfiniSolar V II-1.5KW InfiniSolar V II-2KW / 3KW/5KW

- Pure sine wave output
- Self-consumption and Feed-in to the grid
- Programmable supply priority for PV, Battery or Grid
- User-adjustable charging current and voltage
- Programmable multiple operation modes: Grid-tie, off-grid and grid-tie with backup
- Monitoring software for real-time status display and control
- Parallel operation up to 9 units only for 2KW/3KW/5KW models
- Battery Independent system


On-Grid Inverter with Energy Storage

Hybrid operation

- With battery connected

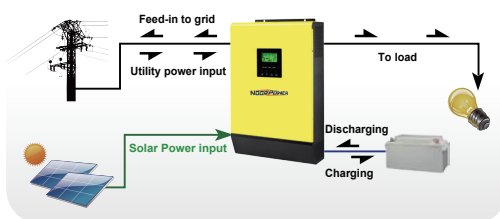

- Without battery connected

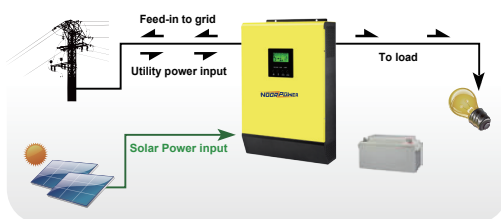

InfiniSolar V II On-Grid Inverter With Energy Storage Selection Guide

MODEL	InfiniSolar V II 1.5KW	InfiniSolar V II 2KW	InfiniSolar V II 3KW	InfiniSolar V II 5KW
Max. PV Array Power	2000W	3000W	4000W	5000W
Rated Output Power	1500W	2000W	3000W	5000W
Maximum PV Array Open Circuit Voltage	400 VDC	450 VDC	450 VDC	450 VDC
MPPT Range @ Operating Voltage	120 VDC ~ 380 VDC	90 VDC ~ 430 VDC	120 VDC ~ 430 VDC	120 VDC ~ 430 VDC
MPP Tracker Number	1	1	1	1
GRID-TIE OPERATION				
GRID OUTPUT (AC)				
Nominal Output Voltage	220/230/240 VAC			
Output Voltage Range	184 - 264.5 VAC or 195.5 - 253 VAC (Selectable)			
Nominal Output Current	6.5A	8.7A	13A	21.7A
Power Factor	> 0.99			
EFFICIENCY				
Maximum Conversion Efficiency (DC/AC)	95%	95%	95%	95%
OFF-GRID, HYBRID OPERATION				
GRID INPUT				
Acceptable Input Voltage Range	90 - 280 VAC or 170 - 280 VAC			
Frequency Range	50 Hz/60 Hz (Auto sensing)			
Maximum AC Input Current	30A	30A	40A	40A
BATTERY MODE OUTPUT (AC)				
Nominal Output Voltage	220/230/240 VAC			
Output Waveform	Pure sine wave			
Efficiency (DC to AC)	93%			
BATTERY & CHARGER				
Nominal DC Voltage	48 VDC			
Maximum Solar Charge Current	30 A	60 A	60 A	80 A
Maximum AC Charge Current	40 A	60 A	60 A	80 A
Maximum Charge Current	40 A	60 A	60 A	80 A
GENERAL				
PHYSICAL				
Dimension, D x W x H (mm)	100 x 300 x 440	120 x 295 x 468	120 x 295 x 468	120 x 295 x 468
Net Weight (kgs)	8	11	11	12
INTERFACE				
Parallel Function	N/A	Yes, 9 units	Yes, 9 units	Yes, 9 units
Communication Ports	USB, RS-232 and dry contact			
ENVIRONMENT				
Humidity	0 ~ 90% RH (Non-condensing)			
Operating Temperature	-10°C to 50°C			

Product specifications are subject to change without further notice.

NOORPOWER

مبيعات تعز / عدن 776222522
مبيعات صنعاء / الحديدة 776222922

صنعاء - شارع الجزائر - تقاطع الدائري - 01/446461 - 01/446460
تعز - الحصب - أسفل جامع الشيباني 04/248044

نور شيبان
Noor Shaiban

لأنظمة الطاقة الشمسية
For Solar System Applications

f Noor.shaiban ✉ Noorshaiban@shebanigroup.com
eng.sameh@shebanigroup.com

www.Noorshaiban.com